


## 訂購規格表

iHDW	L	B	A	A	S	I	M											
SERIES NAME iHDW	SHAPE	MODEL				TYPE			STEPS NUMBER	CABLE LENGTH	DATA INTERFACE		MAGNET					
	SHAPE	M	O	PB1	PB2	EMG STOP	ENABLE	SPECIFICATION			N U M B E R	R O T A R Y S W I T C H S T E P S	M A G N E T					
		D	P	E	L			T Y P E	DC POWER	PULSE				OUTPUT RESISTANCE				
B 標準型	B							A	5V	100PPR	R330	1	PTP 1 AXES	S	3M	I	I/O	MAGNET
L 顯示型	C						●	B	5V	25PPR	R330	2	PTP 2 AXES	L	5M	R	RS232C	MAGNET
F 功能型	D					●		C	12V	100PPR	R2.0K	3	PTP 3 AXES					MAGNET
	E					●		D	12V	25PPR	R2.0K	4	PTP 4 AXES					
	F	●						E	5V	100PPR	DIFF	5	PTP 5 AXES					
	G	●	●					F	5V	25PPR	DIFF	6	PTP 6 AXES					
	H			●	●			G	24V	100PPR	R2.0K	7	PTP 7 AXES					
	I	●				●		H	24V	25PPR	R2.0K	A	BIN 3 AXES					
	J		●				●					B	BIN 4 AXES					
	K	●										C	BIN 5 AXES					
	L					●	●					D	BIN 6 AXES					
	M	●	●				●					E	BIN 7 AXES					
	N			●	●		●											
	O	●				●	●											
	P	●	●	●	●		●											


標準型適用




顯示型接線方塊圖：

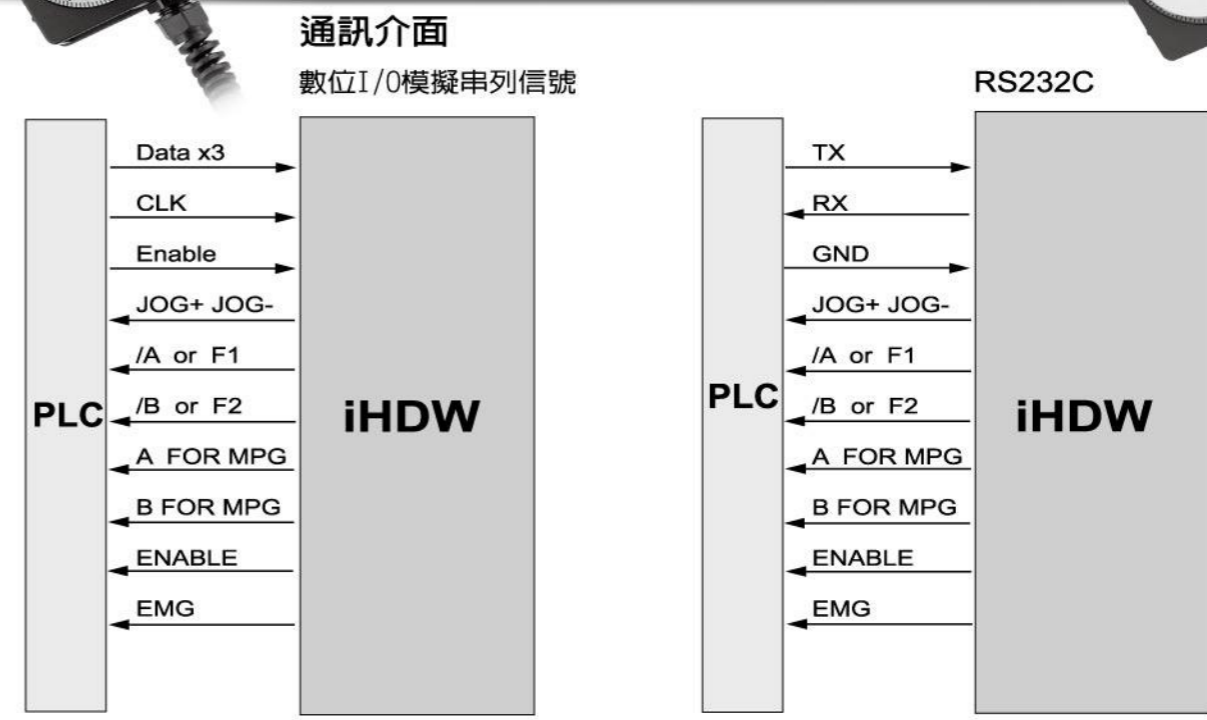

顯示型螢幕顯示圖表：

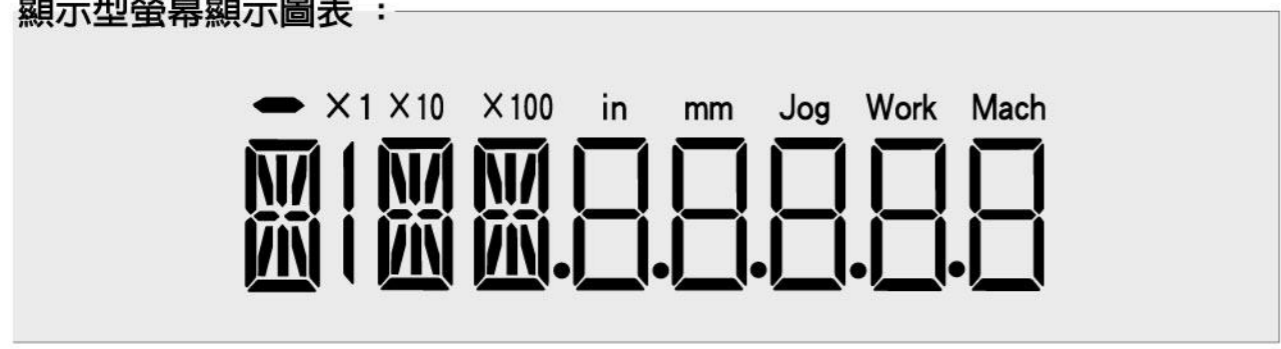

顯示型資料傳輸時序圖 (數位I/O模擬串列信號)：

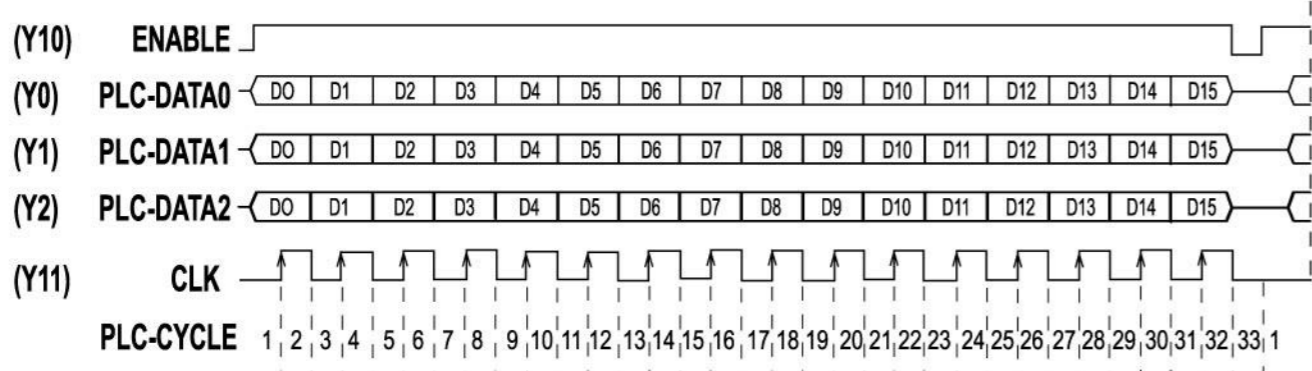

## 智慧型手動脈波產生器

電 氣	電源電壓	5V,12V,24V (±10%)
	脈波數	25PPR,100PPR
	輸出電流	80mA
	信號格式	A.B, A.B./A./B
	反應速度	10KHz
	消耗電流	120mA
通 訊	通訊介面	數位I/O模擬串列信號, RS232C
	資料格式化	8資料位元+1偶同位元,1停止位元
	資料傳輸速度	9600 鮑率, 自動偵測
機 械	起動扭力 (最大)	200g
	軸荷重 (最小)	R 2kg
	旋轉壽命 (最小)	1KKR
	材質	塑膠
	重量	約 1kg
環 境	保護等級	IP65
	操作溫度	0+50°C
	保存溫度	-10°C/+70°C
	操作溼度	RH35%/85%
	耐振動	0.5G X, Y, Z方向各2H
	耐衝擊	2G X, Y, Z方向各3次

智慧型手動脈波產生器